


VDA	Implementation Recommendation for Global Transport Label - GTL	4994			
<p>This non-binding VDA Recommendation provides guidelines for the labelling of packages (shipping units and individual packages) used in the automotive supply processes, taking into account modern logistics concepts. The printed labels (product tags) facilitate unambiguous and consistent recoding and tracking of the packages in the systems of all partners involved in the process, including transport companies, and allow for efficient incoming goods processes.</p> <p>The specification is based on the Global Transport Label (GTL V3.0) devised by Odette, AIAG and JAMA/JAPIA and can be used in both national and international transport processes along the supply chain.</p> <p>Version 1.0 of March 2016</p>					
AK KIT					
<table> <tr> <td>Publisher:</td><td> Verband der Automobilindustrie Behrenstr. 35 PO Box 8 04 62 10004 Berlin Phone Fax </td><td> Copyright Reprint, also in extracts, only with the approval of the publisher. +49 (0)30/897842-221 +49 (0)30/897842-606 </td></tr> </table>			Publisher:	Verband der Automobilindustrie Behrenstr. 35 PO Box 8 04 62 10004 Berlin Phone Fax	Copyright Reprint, also in extracts, only with the approval of the publisher. +49 (0)30/897842-221 +49 (0)30/897842-606
Publisher:	Verband der Automobilindustrie Behrenstr. 35 PO Box 8 04 62 10004 Berlin Phone Fax	Copyright Reprint, also in extracts, only with the approval of the publisher. +49 (0)30/897842-221 +49 (0)30/897842-606			
<div>  <div> Verband der Automobilindustrie </div> </div>					

Disclaimer

VDA Recommendations are available for anyone to use. Users are responsible for correct implementation of the recommendations as required on a case-to-case basis.

The recommendations take into account the prevailing technology at the time of publication. Use of the VDA Recommendations does not absolve anyone from responsibility for their own actions, and all users act at their own risk. Liability of VDA and those involved in drafting of VDA Recommendations is excluded.

Anyone noticing errors or the possibility of incorrect interpretation when applying the VDA Recommendations is requested to notify VDA of this promptly so that any errors can be rectified.

Table of contents

1. Introduction	4
2. Function of labels	5
3. Consignments and transport	6
4. Size, layout and application of labels.....	7
4.1. Dimensions	7
4.2. Data fields on labels	11
4.3. Technical Requirements	14
4.4. Labels for transport packaging units (TPU)	14
4.5. Labels for small load carriers (KLTs).....	15
5. Description of data fields:	16
6. Identification of packages and loading units	26
7. Barcode, 2D code and optional RFID tag	28
7.1. 1D barcode	28
7.2. 2D DataMatrix symbol.....	28
7.2.1. Symbol size.....	28
7.2.2. Character sets.....	29
7.2.3. Message structure according to ISO 15434.....	29
7.2.4. User data for coding in DataMatrix	31
7.3. RFID tags used in conjunction with smart labels	35
7.3.1. Function of passive RFID transponders.....	35
7.3.2. Air interface and frequency range.....	35
7.3.3. Structure and size of memory banks	35
7.3.4. Example of code according to ISO 17367	36
8. Delivery scenarios and requirements regarding the information on the labels	39
9. Appendices	42
9.1. Appendix 1 - Overview of data fields (Excel spreadsheet)	42
9.2. Appendix 2 - Masks for barcodes / DMC (including dimensions).....	42
9.3. Appendix 3 - Reference table of German and English terms.....	42

1. Introduction

Modern supply processes for automotive parts require efficient communication between the parties involved.

The Committee Communication and Information Technologies (KIT) has developed and published recommendations for the streamlining and harmonisation of these communication processes. The recommendation regarding the use of the Global Transport Label is part of a series of publications concerning communication along the supply chain. In this document, the term "label" refers to the label attached to the transport packaging.

The data printed on labels originates from the same data pool as the information printed on dispatch advices (DESADV, VDA 4987) and shipping documents (shipment documents according to VDA 4939).

The relationships between the various advices, notifications, and documents are illustrated in figure 1.

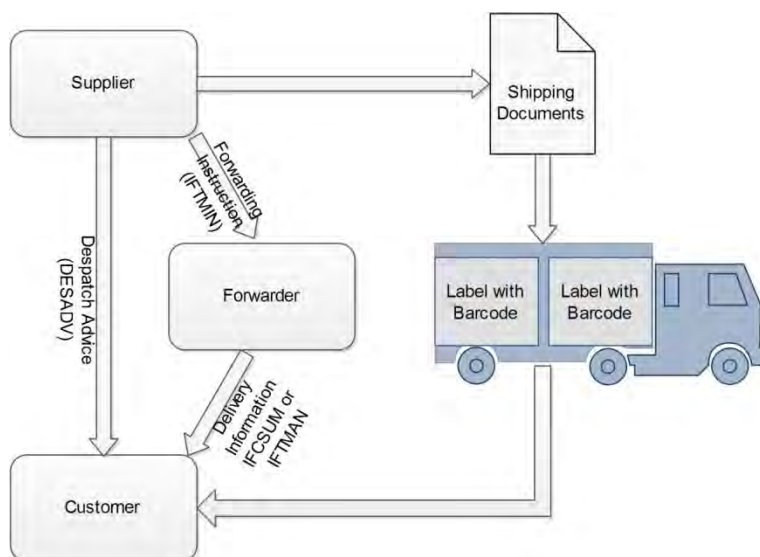


Figure 1

This VDA - Recommendation is in accordance with the Odette Recommendation LL08 "Global Transport Label - European Profile, Version 2".

2. Function of labels

Labels are used to identify product and shipping packages in the internal material flow and along their route from the dispatcher of the goods (normally the factory of the supplier) to the shipping company and eventually to the recipient of the goods (normally the factory of the customer). Labels allow for the unique identification of packages around the globe. In addition to the clear-text information, labels also contain machine-readable data in the form of 1D and 2D barcodes for automated handling.

Depending on the actual purpose of the package unit, the label has different control functions:

- **Product Packaging Unit (PPU):** Examples: cardboard boxes and plastic boxes (also known as Small Load Carriers – SLC). In this case the label provides unique identification of the product, together with additional logistics data. The label generally supports the internal handling of the PPU by the supplier up to the point of consolidation into transport packaging units and by the customer¹ once the transport packaging units are broken down again.
- **Transport Packaging Unit (TPU):** Examples: pallets, loaded with PPUs and auxiliary packaging material (lids, etc.), metal containers or large load carriers (LLC). In this case, the label provides unique identification of the package unit, including details regarding its logistics and material properties. The information on the label is generally used to control consignments along single-stage or multi-stage transport chains from the supplier to the customer and to support the receipt of the goods by the customer with subsequent internal handling including storage in the customer's warehouse.

In cases where the PPU is also the TPU, the labels combine the features and functions of the above two packaging levels. This type of packaging unit is usually described as a **Simplified Loading Unit**.

¹ The internal packaging labels are often referred to as small load carrier SLC Labels.

3. Consignments and transport

The sender of the goods (Ship From) combines Transport Packaging Units into consignments (shipments). A consignment thus consists of all TPUs that are shipped together from the despatch point of the supplier to the designated delivery address of the customer (unloading point at the Ship To²). The consignment remains a unit until it is separated into its component parts, irrespective of the method of transport by which it reaches the delivery address. A consignment therefore remains intact even if it passes through one or more cross-dock points and is unloaded and re-loaded several times.

A transport includes all consignments that are transported by a freight carrier along the same transport leg to the delivery address.

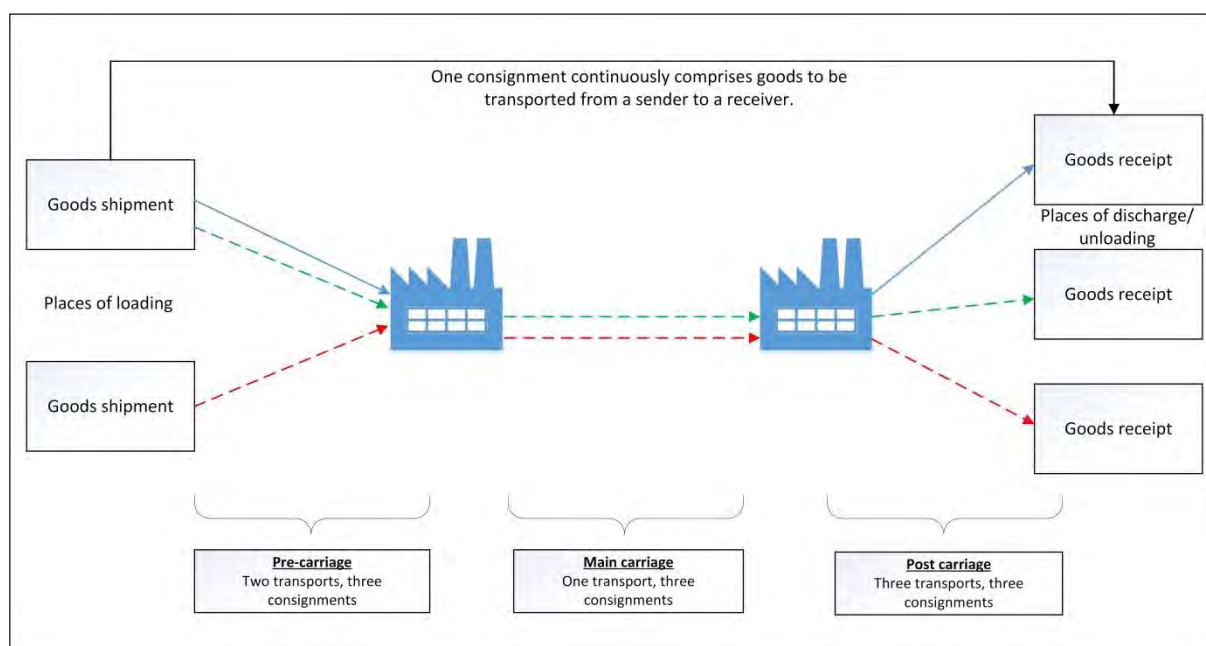


Figure 2 - Relationship between consignment and transport

For cross-dock processes, it might be necessary to print additional information on the tpu labels. For details, see chapter 8.

² NAD + ST/LOC+11

4. Size, layout and application of labels

4.1. Dimensions

Labels can vary in size according to the size of the packaging unit they will be attached to and can sometimes vary according to the region of the world in which they are to be used.

The following sizes are considered to be a fairly exhaustive list:

- a. A5, 210mm x 148mm - see Figure 3
- b. Half letter 216mm x 140mm – see Figure 4
- c. A6, 148mm x 105mm or 152.4mm (6 inches) x 101.6mm (4 inches) - see Figure 5
- d. SLC1: Label for small load carriers (KLTs) 210mm x 74mm - see Figure 6
- e. SLC2: Label for flat small load carriers 210mm x 42mm - see Figure 7

As A6 and B10 are virtually identical in size, they are described together.

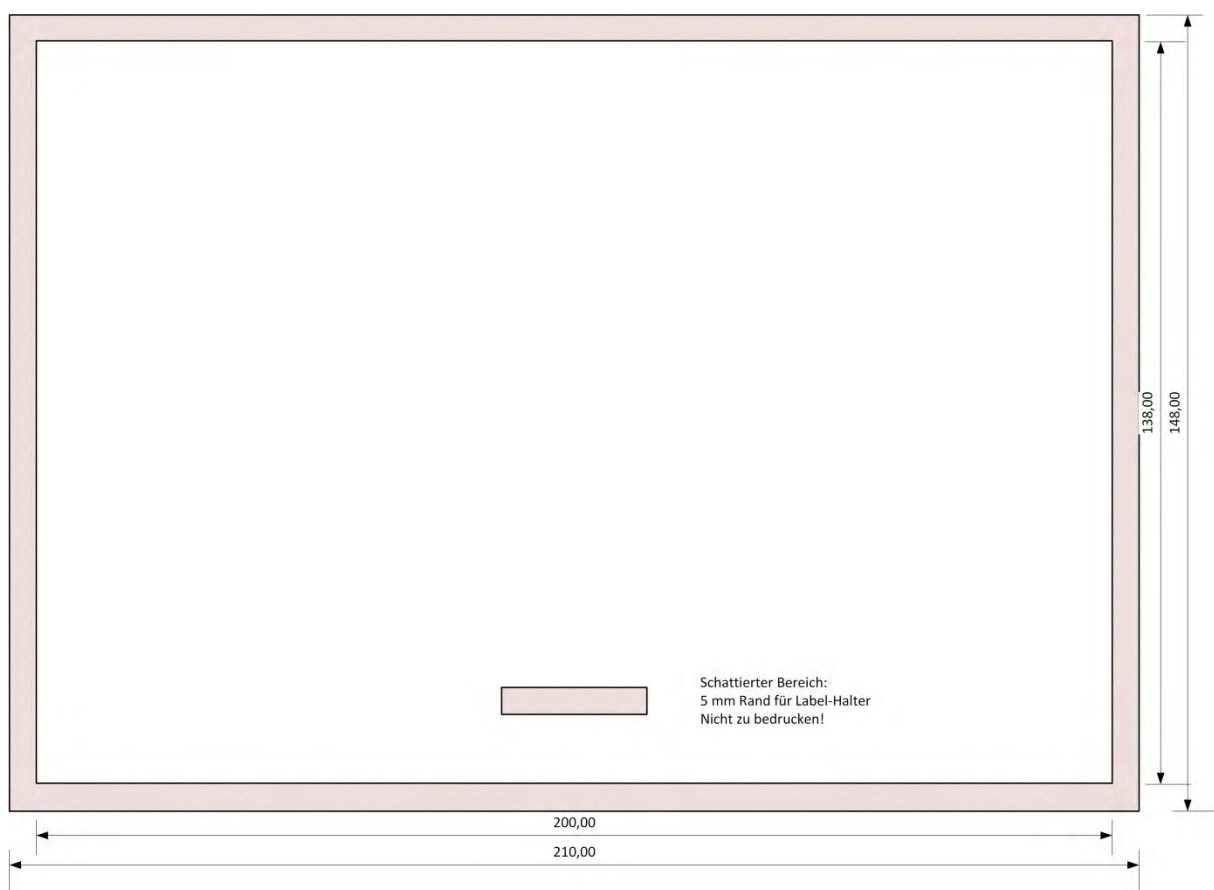
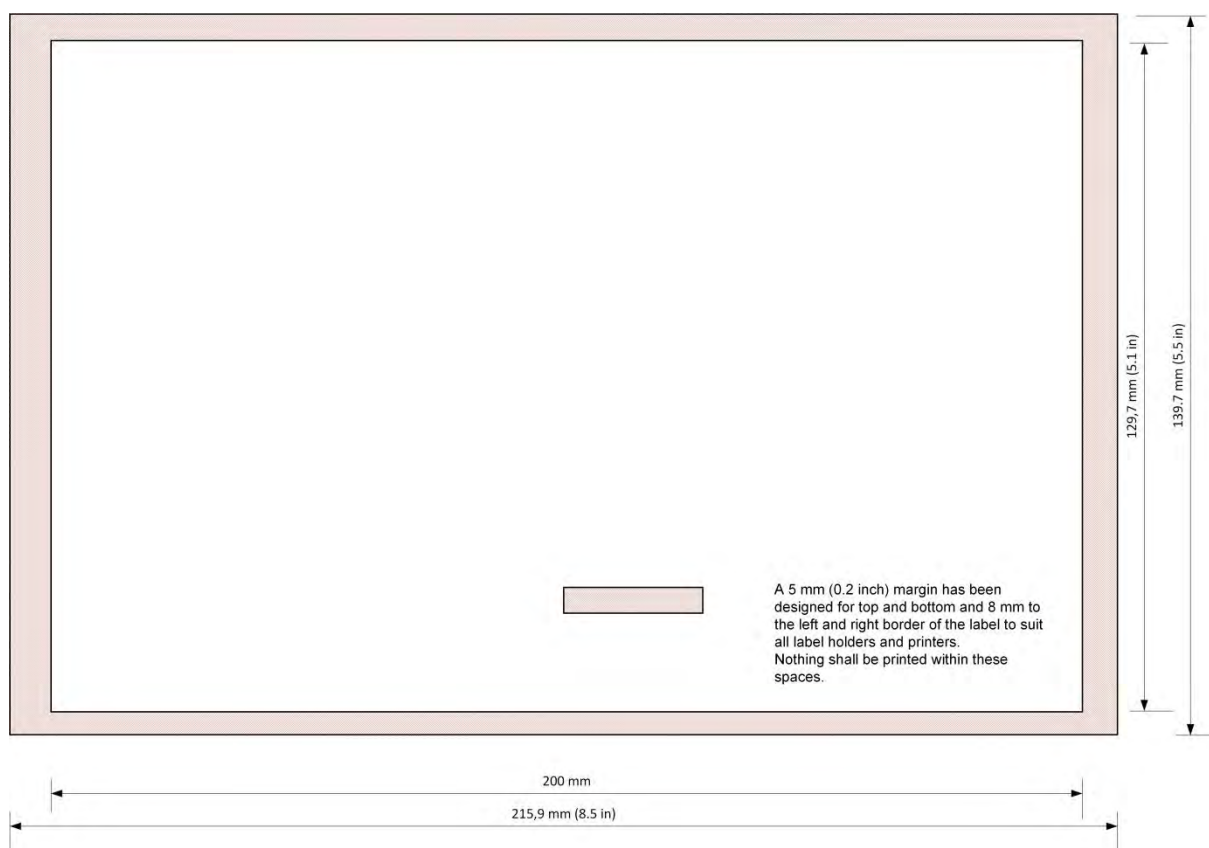


Figure 3 - Label A5 size

**Figure 4 - Label Half-Letter size****Figure 5 - Label size A6/ AIAG**

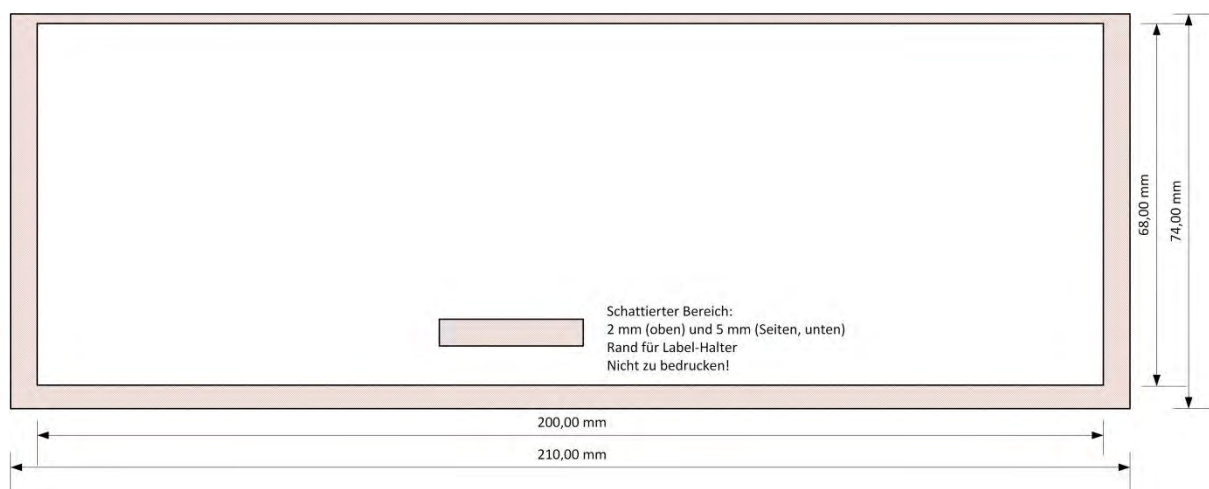


Figure 6 - Label KLT size


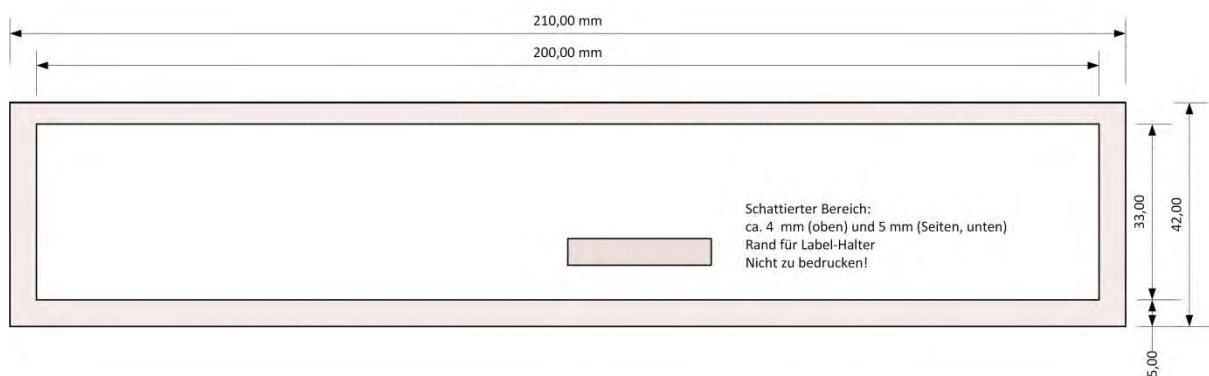


Figure 7 - Label Sub-KLT size

For smaller labels, please refer to VDA 4992 - MAT Label or size A9 in the Odette recommendation for transport labels (5,2 mm x 3,7 mm).

Size comparison between label sizes

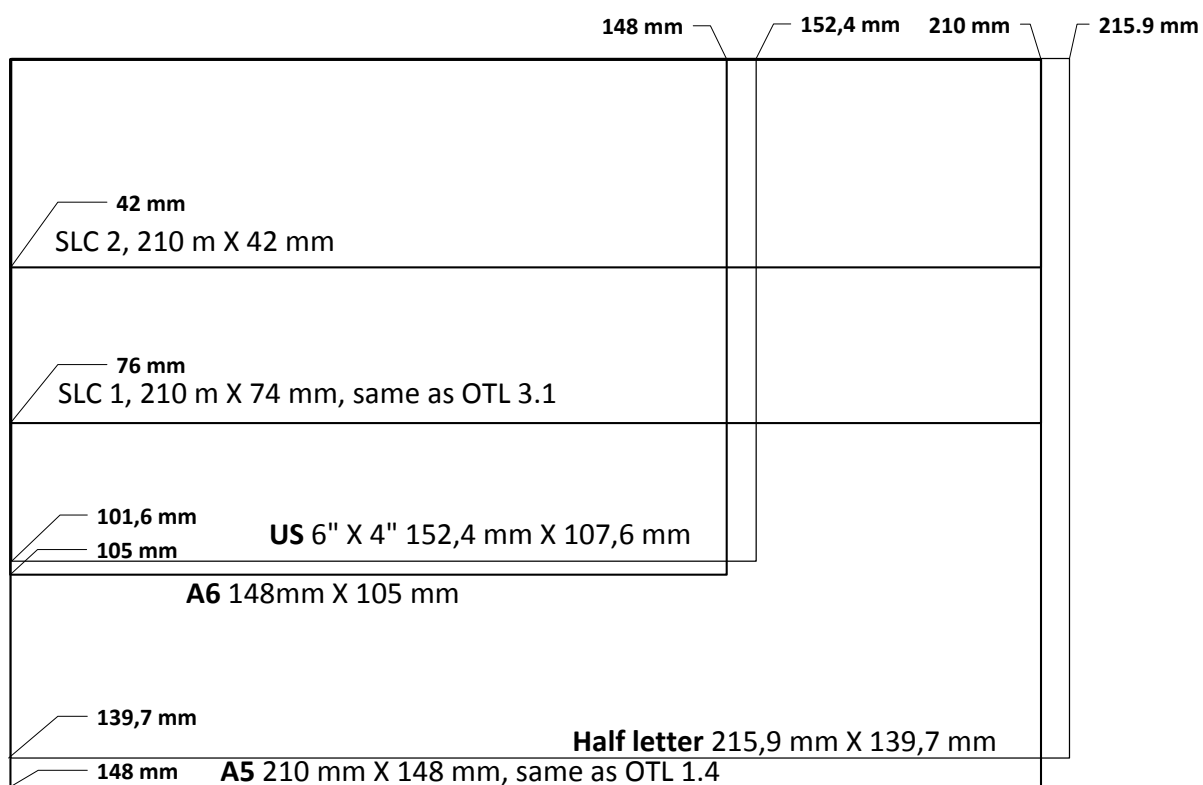

4.2. Data fields on labels

The information printed on the label is divided into logical fields of data according to the applicable layout template.

The following information blocks are defined:

- A1 - Goods sender (ship from)
- A2 - Goods recipient (ship to)
- A3 - Label type and 2D barcode symbol
- B1 - Customer reference 1
- B2 - Customer routing information
- B3 - Logistics reference
- C - Customer's article number
- D1 - Package ID
- D2 - Customer reference 2
- E1 - Optional information as defined by supplier
- E2 - Customer reference 3

For more information, see chapter 5.

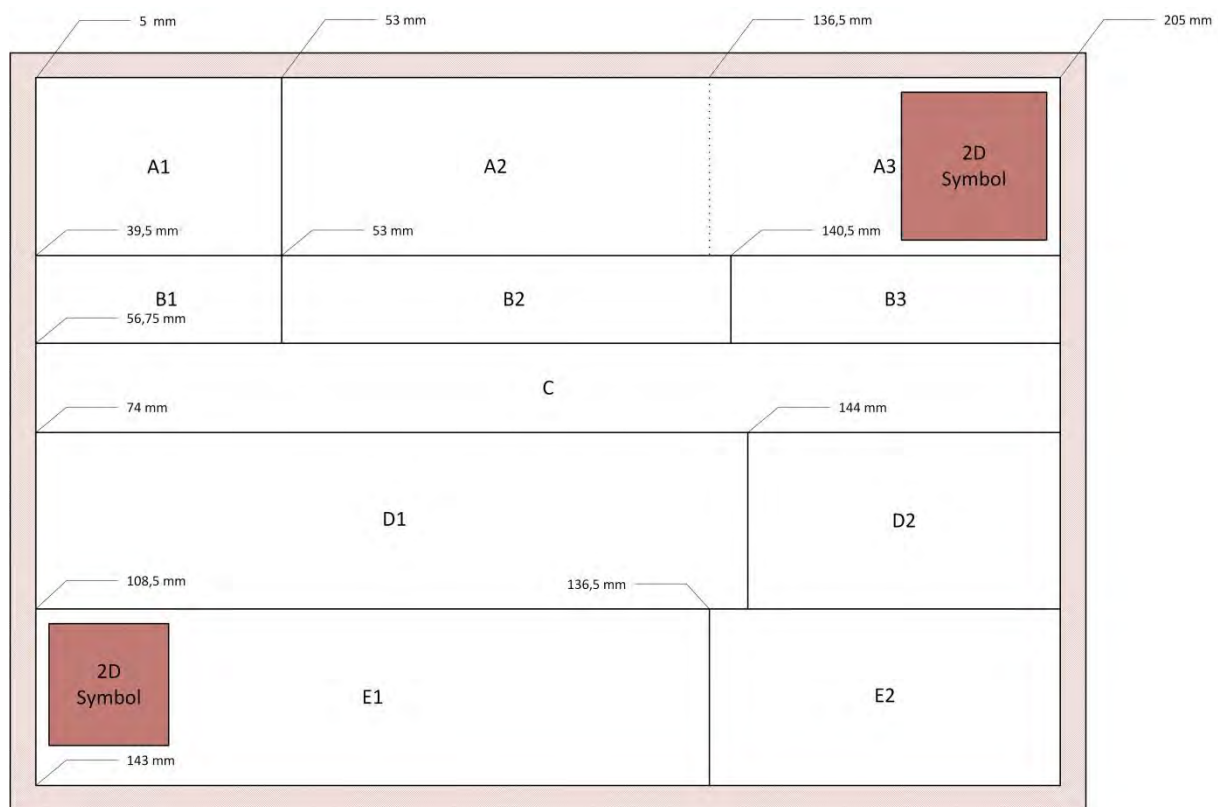


Figure 8 - Dimensions and layout of data fields - label format A5



Figure 9 - Dimensions and layout of data fields - label Half-Letter format

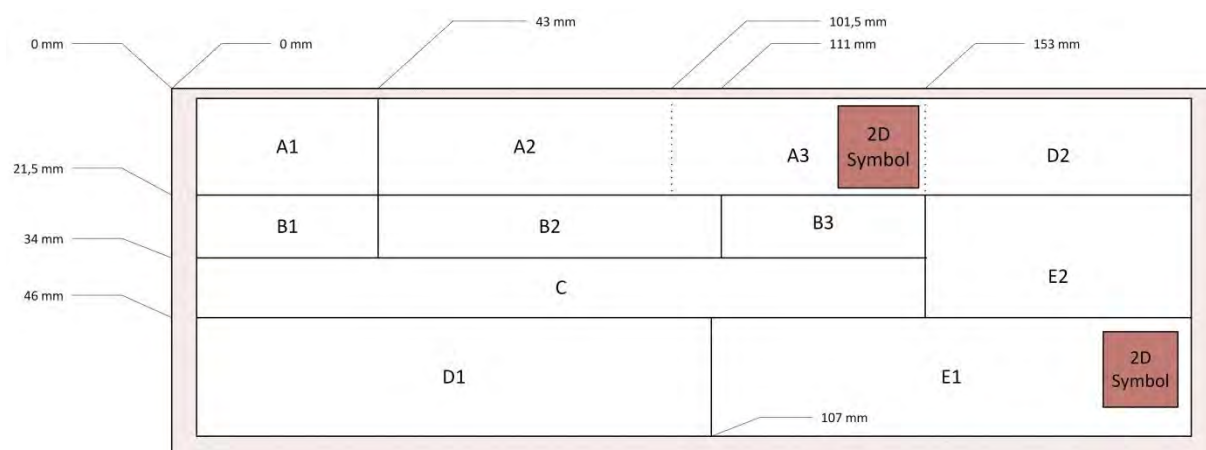


Figure 10 - Dimensions and layout of data fields - label format KLT

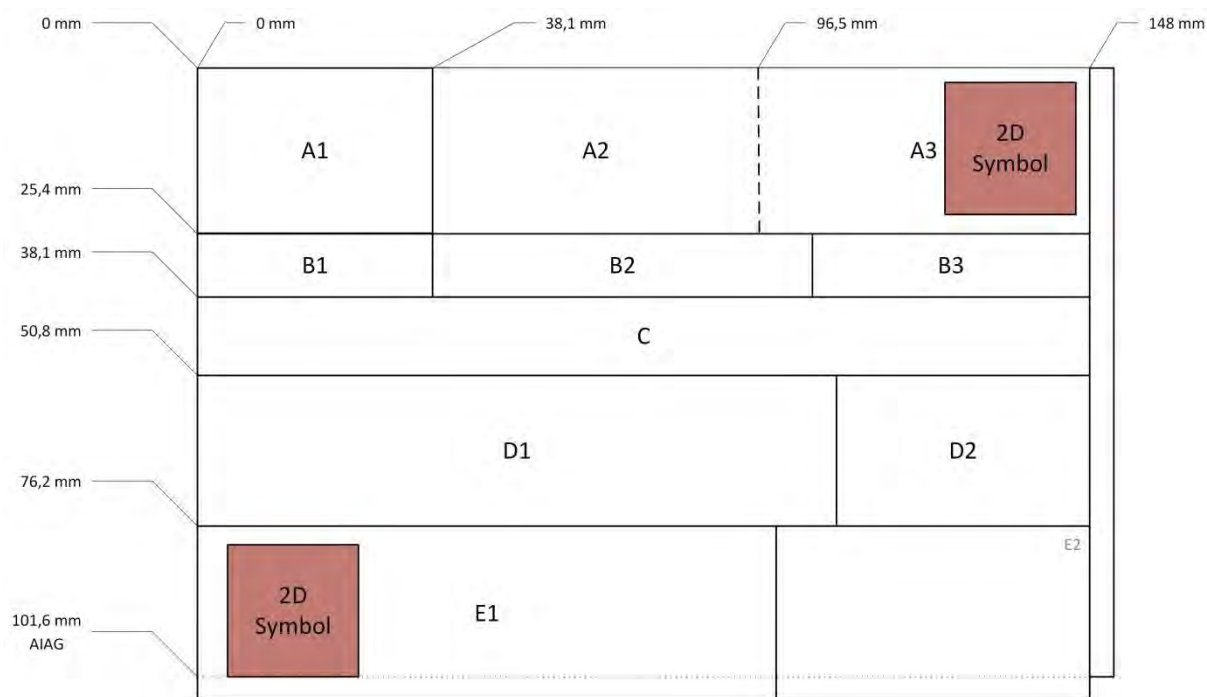


Figure 11 - Dimensions and layout of data fields - label format A6

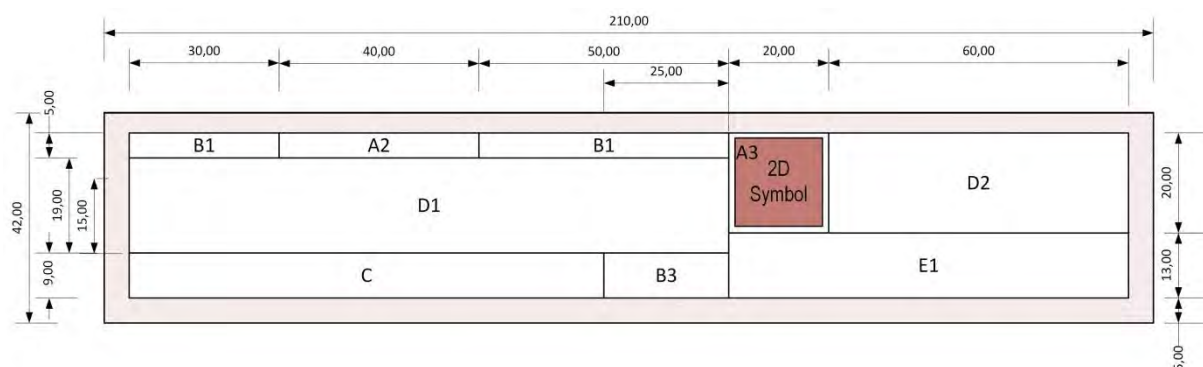


Figure 12 - Dimensions and layout of data fields - label format Sub-KLT (tray)

Note: Due to the small size, the Sub-KLT (tray) label only contains a subset of the information printed on the other labels: sections A1, B1 and E2 are omitted, and section B1 is divided into two parts as shown in the figure.

4.3. Technical Requirements

- Insert label	= min. 120	g/m ²
- Adhesive label	= min. 80	g/m ²
- Combined label	= approx. 130-170	g/m ²
- Carrier material	= approx. 50-90	g/m ²
- Label material	= approx. 80	g/m ²
- Paper	= white, machine-finished, moisture-resistant	
- Adhesive	= permanent adhesive, moisture-resistant, easy to remove	

Depending on customer requirements, insert labels might be secured with adhesive dots, or might be produced from a heavier paper.

For use with returnable containers, adhesive labels must be easy to remove without leaving behind any residue.

If the labels have to be attached to boxes without label holders, then adhesive components will need to be used (sticky labels, adhesive dots). The method to be used must be approved by the customer.

For shipments to and from North America, labels of size Half Letter or A6 or 6x4" might be used, if approved by the customer.

In principle, the labelling rules (number of labels, positioning, attachment, type of label) must be agreed bilaterally between the business partners. For trouble-free machine reading, however, the labels must be attached horizontally on the packaging.

Before applying new labels, all old (and thus invalid) labels must be removed from the packaging.

4.4. Labels for transport packaging units (TPU)

For TPUs, label format A5 landscape should be used. It can be designed as an insert label (if a suitable label frame/holder is available) or as a self-adhesive label. Depending on the type, the following specifications must be observed:

Labels for TPUs:

- Master Label for homogeneous TPU: the TPU holds individual PPUs which all contain the same article number (e.g. packed in SLCs). The individual PPUs are equipped with separate Single labels: a Single Label denominates the label on the PPU, i.e. innermost packaging unit containing the parts.
- Master Label for mixed TPU (Mixed Label): The TPU holds individual PPUs which do not all contain the same article number. The individual PPUs are equipped with separate Single Labels.
- Single Label for simplified TPU: the TPU contains only parts with the same article number but which are **not** packed in individual PPUs.

Labels applied to TPUs are also referred to as Main Labels.

4.5. Labels for small load carriers (KLTs)

For containers according to VDA small load carrier system (VDA 4500), the DIN A5 label might also be used for KLTs, provided that the label can be inserted into the label frame without having to be folded.

Instead of using folded labels, the SLC 1 or SLC 2 label size should be used. Please follow customer's instructions regarding use of SLC 1 and SLC 2.

The use of adhesive labels on KLTs is prohibited. Prior to returning the empty containers to the sender, all labels must be removed.

5. Description of data fields:

For all text content, use font Arial Narrow, bold (alternative font: Helvetica Condensed, bold). Text must be printed in capital letters. The font size is 6 pt.

The data fields and lines must be identified with headings or titles as specified in the table below. These titles are to be printed in German. For international deliveries, the parties might agree to print the field titles in English. A reference table with translations is included in appendix 4.

The table below lists the contents of the individual fields in detail.

For details regarding the origin of the data and how it relates to the information contained in the DESADV message, see appendix 1.

A1 - Goods despatcher


Function:	Information regarding goods dispatcher and country of origin	
Title:	SHIP FROM	
Content:	L1: Name of goods sender L2: Name of goods sender, continued or blank L3: Town/city, L4: Country code (ISO 2 alpha code) and postal code, L5: ID (supplier number) of the ship from L6: Country of origin of goods (ISO 2 alpha code),	
Example	 <p>The example shows a label with the following text: SHIP FROM, LIEFERANT AG, WERK BERLIN, BERLIN, DE-10117, ID: 887766554, COUNTRY OF ORIGIN: DE.</p>	

A2 - Goods recipient


Function:	Information regarding goods recipient, unloading point, storage location	
Title:	SHIP TO	
Content:	L1: Name of goods recipient L2: Name of goods recipient, continued or blank L3: Address of goods recipient L3: Country, postal code and town/city of goods recipient L4: Plant, unloading point, customer internal destination, separated by forward slashes "/" Note: The separating line between A2 and A3 is not printed. If the identifiers of the plant, unloading point and customer internal destination exceed the space available in A2, they may extend into field A3. There must, however, always be a blank space of at least 3mm width before the 2D symbol.	

Example	<p>SHIP TO MODERN CAR INC. LONDON PLANT 72 GREAT PETER STREET UK SW1P 2BN LONDON PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION 013/RAMP 15/WH4</p>
---------	---



A3 - Label type and 2D barcode symbol

Function:	Identification of label type (Master, Mixed, Single) and 2D code
Title:	none
Content:	<p>Label type codes: M = Master, MIX = Mixed, S = Single Data Matrix symbol 1 (see User data for coding in DataMatrix) On DIN A5 and DIN A6 labels, there should be a 10mm right margin to the 2D code.</p>
	 <p>Note: The separating line between A2 and A3 is not printed. If the identifiers of the plant, unloading point and customer internal destination exceed the space available in A2, they may extend into field A3. There must, however, always be a blank space of at least 3mm width before the 2D symbol.</p>

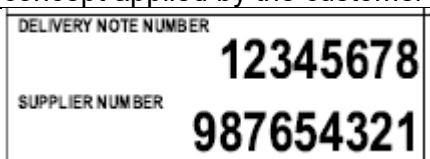B1 - Customer reference 1

Function:	Reference data #1 of customer
Title:	DELIVERY NOTE NUMBER / SUPPLIER NUMBER
Content:	<p>Associated delivery note number, assigned by ship from Supplier number assigned to the seller by the customer. This supplier number may differ from ship-from's identifier, depending on the numbering concept applied by the customer</p>
Example	

B2 - Customer routing information

Function:	Details required by the customer for the internal routing of the container after receipt of the goods.
Title:	CUSTOMER ROUTING INFO
Content:	<p>Customer-specific routing information ID and reference number(s), assigned by customer. This information is supplied as part of the call-off and does not need to be interpreted by the supplier. The data must be passed 1:1 through the IT system of the supplier for printing on the label. The customer can change the systematic or syntax of the information without the need for any adjustments in the IT system by the supplier.</p> <p>Point of use Internal point of use at the customer's premises</p> <p>This field is only completed, if the respective information has been communicated by the customer as part of the call-off. Otherwise, the field remains blank.</p>
Example	 <p>Single-line version</p>  <p>Two-line version</p>


B3 - Logistics reference

Function:	Logistics reference details for customer
Title:	ETA, QUANTITY, <i>QUANTITY UNIT</i> , NET, GROSS WEIGHT
Content:	<p>Expected time of arrival - ETA: expected/request delivery time of the goods at the customer's premises. This field is also used for cross-dock processes, for instance to define shipping priorities. This information is only useful for labels on loading units.</p> <p>Quantity: Number of parts contained in package; on Master Labels: total number of parts in loading unit.</p> <p>QUANTITY UNIT: Quantity unit code (see Table 2). The quantity unit is printed dynamically in the title.</p> <p>Net weight: Net weight of the parts in the package or in the loading unit, in KG, including decimal point where required.</p> <p>Gross weight: Gross weight of package or loading unit in KG, without decimals; if the gross weight is < 1kg, it is stated as 1kg.³</p>


³ The decimal separator might be a full stop or a comma, as decided by the label producer. Thousand separators are not used.

Example	<div data-bbox="419 194 986 347"> <p>ETA 2016-01-15/13:30</p> <p>QUANTITY (PCE) NET KG GROSS KG</p> <p>100 7,8 10</p> </div> <p>A5 label</p> <div data-bbox="414 392 790 510"> <p>ETA 2016-01-15/13:30</p> <p>QUANTITY PCE GROSS KG NET KG</p> <p>100 10 7,8</p> </div> <p>KLT label</p>
---------	--

C - Customer's article number



Function:	Customer's article number; safety symbol (if required): circle with triangle (see figures)
Title:	ARTICLE NUMBER
Content:	<p>Article number: Customer-assigned article number of part.</p> <p>Safety symbol where applicable. Certain parts are subject to special documentation requirements. If required by the customer, packages containing such parts must be labelled accordingly. The safety symbol must be printed in the field with a blank area of 2mm to the right.</p> <p>The customer's part designation may be printed to the right of the heading.</p>
	<div data-bbox="352 958 1417 1059"> <p>CUSTOMER PART NUMBER LEFT MOUNT ALUMINIUM</p> <p>GFS-123-554-747</p>  </div>

D1- Package ID

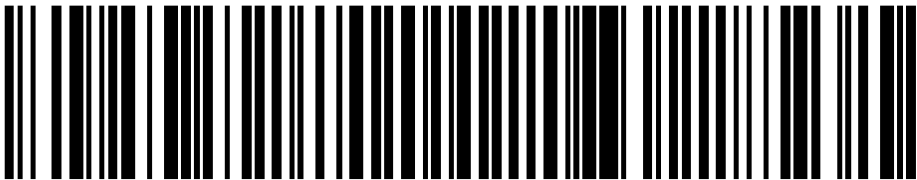
Function:	Transmission of unique package ID (license plate)
Title:	PACKAGE ID
Content:	<p>Package ID in plain text, formatted (with spaces between IAC, CID and serial number; see also chapter 6), preceded by data identifier in brackets.</p> <p>Globally unique package ID in the form of a barcode, encoded according to code 128.</p> <p>6mm blank area to the left and right.</p> <p>For details regarding the package ID, see chapter 6.</p> <p>For details regarding the barcode, see chapter 7.</p>
	<div data-bbox="352 1503 1417 1800"> <p>PACKAGE-ID (1J) OD A123 273000944</p>  </div>

Note: if Odette IDs are used, the 4 character main OSCAR code is relevant to identify the originator of the serial number (licence plate).

D2 - Customer reference 2

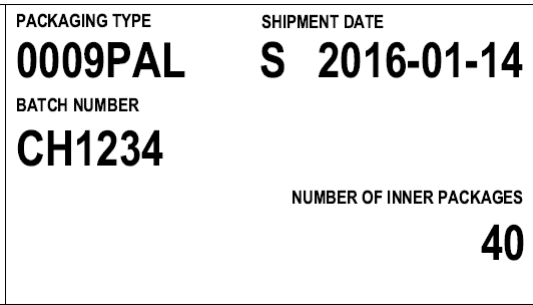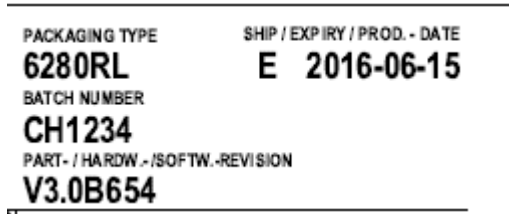Function:	Reference data #2 of customer	
Title:	See figure	
Content:	<p>Package type, qualified date, parts generation status, batch number On Master and Mixed Labels attached to loading units: Package type, shipping date, number of inner packages</p> <p>The following applies to inner packages and simplified loading units:</p> <ul style="list-style-type: none"> • If there is an expiry date, it must be printed. The expiry date must be preceded by the letter "E". • If there is no expiry date, and if the shipping date is known at the time of printing the label, the shipping date should be printed. The shipping date must be preceded by the letter "S". • If none of the above dates are known or apply, the production date should be printed. The production date must be preceded by the letter "P". <p>See also chapter 8.</p>	
Example		Field D2 on Master Label
		

E1 - Optional information as defined by supplier

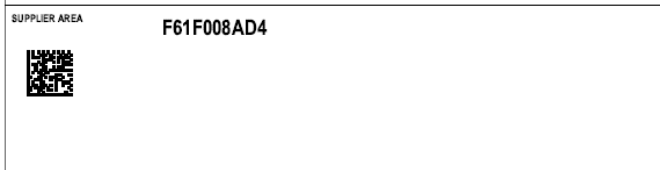Function:	Internal information	
Title:	not defined	
Content:	<p>May be used by the supplier for internal purposes, e.g. for 2D code. On A5/A6 Labels, the symbol is aligned to the left, with a left margin of 10mm. On Labels of size 210mm x 74mm or 210mm x 42mm, the symbol is aligned to the right with a right margin of 10mm.</p> <p>The use of 1D barcodes is not permitted in this field.</p>	
Example		

E2 - Customer reference 3

Function:	Other customer reference information	
Title:	not defined	
Content:	<p>This field contains customer data that is transmitted in the PCI segment (qualifier 16 or 3) of the customer call-off.</p> <p>PCI+16: Maximum size: 5 lines. For each line, the customer transmits one DE 7102 in the PCI segment. In order to ensure that the code is correct, the DE 7102 must not exceed 25 characters per line. If the customer transmits more characters per line, all characters that exceed the prescribed length are lost when the label is printed.</p> <p>PCI+3: The customer can use all 10 x 35 characters (DE 7102) in the PCI segment. The content is printed as DMC. Note: PCI+3 is only supported in JIT delivery instructions according to VDA recommendation 4985.</p>	
	CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5	

On 210 x 42mm labels, the fields are completed as follows:

Table 1 - Field contents for SLC2 (tray) label

Block	Title	Content(s)
A1	SHIP FROM ID	Ship from unique identifier
A2	SHIP TO	Name1 of goods recipient
B1 (1)	DELIVERY NOTE	Delivery note number
B1 (2)	SUPPLIER NUMBER	Supplier number
B3	QUANTITY	Quantity per package and quantity unit
C	ARTICLE NUMBER	Customer-assigned article number The customer's part designation may be printed to the right of the heading
D1	PACKAGE ID	Package ID in plain text, formatted for printing (with spaces between IAC, CID and serial number; see also chapter 6), preceded by data identifier in brackets. Data identifier concatenated with the globally unique package ID (licence plate) in the form of a barcode, encoded according to code 128. On SLCs, the barcode has a height of 15mm. For A5 Labels, it must be minimum 17mm high. There must be a blank area of 6mm to the right and left.
D2	PACKAGE TYPE	Package type, qualifying date, parts generation status, batch number.
	EXPIRY DATE SHIPMENT DATE	The following applies to inner packages and simplified loading units:

	PRODUCTION DATE	<ul style="list-style-type: none"> If there is an expiry date, it must be printed. The expiry date must be preceded by the letter "E". If there is no expiry date, and if the shipping date is known at the time of printing the label, the shipping date should be printed. The shipping date must be preceded by the letter "S". <p>If none of the above dates are known or apply, the production date should be printed. The production date must be preceded by the letter "P".</p>
	BATCH ENGINEERING CHANGE ID	Batch number Engineering change ID
E1	Not defined.	May be used by the supplier for internal purposes, e.g. for 2D code. On DIN A5/A6 Labels, the symbol is aligned to the left, with a left margin of 10mm. On labels of size 210mm x 74mm or 210mm x 42mm, the symbol is aligned to the right with a right margin of 10mm. The use of 1D barcodes is not permitted in this field.
E2	Not defined	<p>This field contains customer data that is transmitted in the PCI segment (qualifier 16 or 3) of the customer call-off.</p> <p>PCI+16: Maximum size: 5 lines. For each line, the customer transmits one DE 7102 in the PCI segment. In order to ensure that the code is correct, the DE 7102 must not exceed 25 characters per line. If the customer transmits more characters per line, all characters that exceed the prescribed length are lost when the label is printed.</p> <p>PCI+3: The customer can use all 10 x 35 characters (DE 7102) in the PCI segment. The content is printed as Data Matrix Code.</p>

Table 2- EDIFACT units, ANSI units and abbreviations/codes used on labels

UN/EDIFACT	ANSI X12.3	Form DE	Form EN	Meaning
PCE / C62	PC	ST	PC	Piece
MTR	MR	M	M	Meter
CMT	CM	CM	CM	Centimetre
MMT	MM	MM	MM	Millimetre
MTK	SM	M2	M2	Square meter
MTQ	CR	M3	M3	Cubic meter
LTR	C8	L	L	Litre
LEF	X7	BL	LF	Leaf
PR	PR	PA	PA	Pair

RO	RL	RO	RO	Roll
KGM	KG	KG	KG	Kilogram
GRM	GR	G	G	Gram
KMT	DK	KM	KM	Kilometre
TNE	MP	T	T	Ton (metric)

Note: The data identifier used in the Data Matrix Code requires the unit of measure to be coded according to ANSI X12. On the other hand, on the label the unit of measure should be understandable to the human reader. The table above contains the cross references of applicable codes.

Complete labels can look like:





SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554		SHIP TO MODERN CAR INC. LONDON PLANT 72 GREAT PETER STREET UK SW1P 2BN LONDON <small>PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION</small> 013 / RAMP 15 / WH4		M 
COUNTRY OF ORIGIN: DE DELIVERY NOTE NUMBER 12345678		CUSTOMER SPECIFIC ROUTING INFORMATION ROUTE 66 LINE15		ETA 2016-01-15/13:30 QUANTITY (PC) 1000000 NET KG 9999 GROSS KG 19999
CUSTOMER PART NUMBER LEFT MOUNT ALUMINIUM GFS-123-554-765 				
PACKAGE-ID (S-J) UN 987654321 000123456 		PACKAGING TYPE 0009PAL SHIPMENT DATE S 2016-01-14 BATCH NUMBER CH1234 NUMBER OF INNER PACKAGES 40		
SUPPLIER AREA  Lieferantendaten Zeile 1 Lieferantendaten Zeile 2 Lieferantendaten Zeile 3		CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5		

Figure 13 - A5 Master Label for homogeneous loading unit


SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554		SHIP TO MODERN CAR INC. LONDON PLANT 72 GREAT PETER STREET UK SW1P 2BN LONDON PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION 013 / RAMP 15 / WH4		MIX 	
COUNTRY OF ORIGIN: DE		DELIVERY NOTE NUMBER 12345678		CUSTOMER SPECIFIC ROUTING INFORMATION	
CUSTOMER PART NUMBER		ETA 2016-01-15/13:30		NET KG 780 GROSS KG 850	
PACKAGE-ID (5J) UN 987654321 000123458		PACKAGING TYPE GLT4711		SHIPMENT DATE S 2016-01-14	
		BATCH NUMBER		NUMBER OF INNER PACKAGES 40	
SUPPLIER AREA 		SUPPLIER DATA LINE 1 SUPPLIER DATA LINE 2 SUPPLIER DATA LINE 3		CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5	

Figure 14 - A5 Mixed Label for mixed loading unit





SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554		SHIP TO MODERN CAR INC. LONDON PLANT 72 GREAT PETER STREET UK SW1P 2BN LONDON PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION 013 / RAMP 15 / WH4		S 	
COUNTRY OF ORIGIN: DE		DELIVERY NOTE NUMBER 12345678		CUSTOMER SPECIFIC ROUTING INFORMATION	
SUPPLIER NUMBER 987654321		ROUTE 66 LINE15		ETA 2016-01-15/13:30	
CUSTOMER PART NUMBER		QUANTITY (PC) 1000		NET KG 780 GROSS KG 850	
LEFT MOUNT ALUMINIUM		GFS-123-554-765			
PACKAGE-ID (1J) UN 987654321 000123457		PACKAGING TYPE KLT4738		PRODUCTION DATE P 2016-01-14	
		BATCH NUMBER CH1234		ENGINEERING CHANGE / HARDWARE REV. / SOFTWARE REV. 2015-11-01	
SUPPLIER AREA 		SUPPLIER DATA LINE 1 SUPPLIER DATA LINE 2 SUPPLIER DATA LINE 3		CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5	

Figure 15 - A5 Single Label for simplified loading unit or inner packaging

SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554 COUNTRY OF ORIGIN DE		SHIP TO MODERN CAR INC. LONDON PLANT UK SW1P 2BN LONDON PLANT / UNLOADING POINT / STOCK LOCATION 013 / RAMP 15 / WH4		S		PACKAGING TYPE KLT4738	SHIP / EXPIRY / PROD. - DATE P 2016-01-14
DELIVERY NOTE NUMBER 12345678		CUSTOMER SPECIFIC ROUTING INFORMATION ROUTE 66 LINE15				BATCH NUMBER CH1234	PART - / HARDW. - / SOFTWARE - REVISION 2015-11-01
SUPPLIER NUMBER 987654321		CUSTOMER PART NUMBER LEFT MOUNT ALUMINIUM		ETA 2016-01-15/13:30	QUANTITY PC 1000	GROSS KG 850	NET KG 780
CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5							
PACKAGE-ID (1J) UN 987654321 000123457							
				SUPPLIER DATA LINE 1 SUPPLIER DATA LINE 2 SUPPLIER DATA LINE 3			

Figure 16 - Single Label in KLT format for inner packaging



SHIP FROM ID 887766554		SHIP TO MODERN CAR INC.		DELIVERY NOTE 12345678			PACKAGE TYPE KLT4738	PRODUCTION DATE P 2016-01-14
SUPPLIER NUMBER 12345678		PLACE OF USE LINE15		ROUTING CODE ROUTE 66			BATCH NUMBER CH1234	PART - / HARDWARE - / SOFTWARE REVISION 2015-11-01
PART NUMBER LEFT MOUNT ALUMINIUM		QUANTITY 1000		UOM PC		SUPPLIER DATA LINE 1 SUPPLIER DATA LINE 2 SUPPLIER DATA LINE 3		
CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5								

Figure 17 - Single Label in tray format; remark: the separator lines left of section A2 and on top of section E1/E2 will not be printed in order to enhance readability of the DMC




SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554 C. OF ORIGIN: DE		SHIP TO MODERN CAR INC. 72 GREAT PETER STREET UK SW1P 2BN LONDON PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION 013/RAMP 15/WH4		S	
DELIVERY NOTE NUMBER 12345678		CUSTOMER SPECIFIC ROUTING INFORMATION ROUTE 66 LINE15			
SUPPLIER NUMBER 987654321		CUSTOMER PART NUMBER LEFT MOUNT ALUMINIUM		ETA 2016-01-15/13:30	QUANTITY (PC) 1000
GROSS KG 850		NET KG 780			
CUSTOMER DATA LINE 1 CUSTOMER DATA LINE 2 CUSTOMER DATA LINE 3 CUSTOMER DATA LINE 4 CUSTOMER DATA LINE 5					
PACKAGE-ID (1J) UN 987654321 000123457					
					
SUPPLIER DATA LINE 1 SUPPLIER DATA LINE 2 SUPPLIER DATA LINE 3					

Figure 18 - Single label US 6x4"

6. Identification of packages and loading units

In the complex and often multi-stage logistics processes that prevail in the automotive industry, correct identification of the individual packages and loading units is crucial for the efficient control of the various process steps. It is therefore necessary to devise a global identification system that covers all packages and loading units.

The automotive industry has generally adopted identifiers based on ISO 17367.

A package identifier, hereafter referred to as the package ID, and the data identifier (DI) have the following structure:

Table 3- General structure of package ID

DI	IAC	CIN	SN
Data Identifier	Issuing Agency Code	Company Identification Number	Serial Number
XX	YY	Variable	Fixed
2 char (an)	2 char (an)	4 - 13 char (an)	9 char (n)

The data identifier (DI) is a classifying characteristic and precedes the actual barcode content. The data identifier classifies the packages into Single, Homogeneous Master, Mixed Master, see Table 4. The data identifier forms part of the barcode and is displayed on the label in brackets, preceding the package ID.

Each package ID begins with an Issuing Agency Code (IAC). This is the code of the agency or organisation that has issued the ID. For the German automotive industry, we recommend using the numbering system of Dun & Bradstreet, abbreviated as UN. For the unique identification of companies, corporate divisions and traders, Dun & Bradstreet uses the nine-digit numerical D-U-N-S code (*Data Universal Numbering System*).

The serial number of the package is devised by the despatcher of the goods. Operators in the automotive industry are generally using serial numbers and we recommend to continue using such codes. To ensure compatibility with the existing systems, the serial number should also have 9 digits (with added leading zeros, where required). Serial number must not be longer than N9.

This Recommendation does not restrict the generator of the ID in choosing an ID, provided that the package ID is a globally unique identifier.

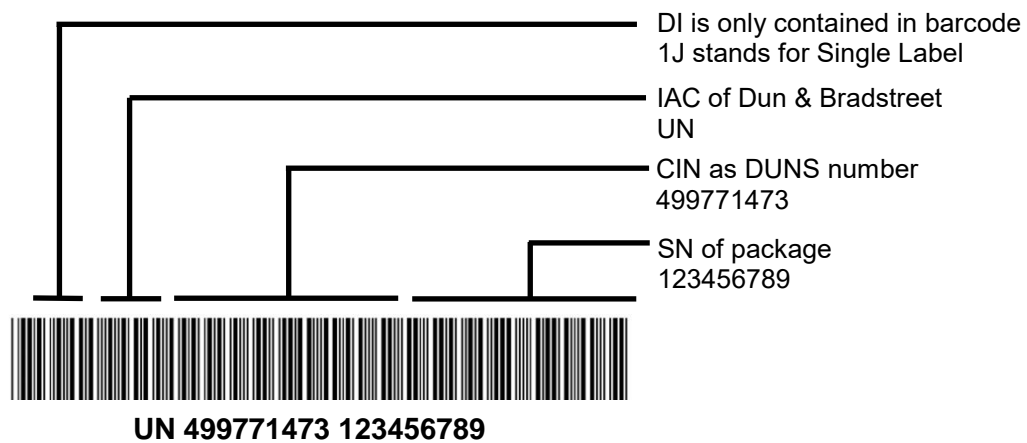


Figure 1 - Example of package ID

The total length of the package identification number, including DI, must not exceed 22 digits.

Table 4 - Admissible data identifiers

1J	Unique package ID of inner packaging (Single Label)
3J	Unique package ID of JIS loading unit with compartments
4J	Unique package ID of JIS loading unit with 1...n JIS packages
5J	Unique package ID of mixed loading unit with intermediate packaging level (mixed master)
6J	Unique package ID of loading unit or intermediate packaging containing identical parts (Master Label for homogeneous loading unit)

7. Barcode, 2D code and optional RFID tag

The structure of the barcode and its conformity with the applicable standard must be verified with an IT tool. The barcode quality must be verified as follows: for code 128 according to ISO/IEC 15416; for 2D codes according to ISO/IEC 15415. These standards include test specification to determine the quality of the barcode.

To validate the barcode, the measured print quality must be minimum grade 3.0 (B). This is to ensure that the print quality does not drop below 1.5 (C) at the point of scanning (measured with an instrument aperture of 0.254mm (0.01 inch) and a light wavelength of 660nm +/- 10nm).

7.1. 1D barcode

The barcode is a code 128 barcode. It contains the package ID (license plate). In readable versions, the data identifier (1J, 5J, 6J) is omitted. Otherwise, the barcode corresponds to the readable version of the package ID. Spaces are only included to make the printed text more readable but are omitted in code 128.

Module width "X" for one element in code 128: X = minimum 0.51mm (20mil) and maximum 0.64mm (25mil). The blank area to the left and right must be at least ten times X.

The minimum height of code 128 for tray, KLT and B10 labels is 15mm. For A5 labels, it is 17mm. For A5 labels, we recommend that the barcode is 20mm high.

7.2. 2D DataMatrix symbol

7.2.1. Symbol size

The data matrix code is a DataMatrix ECC 200 code (see also ISO/IEC 16022). The nominal height/width of the modules (x) is 0.4mm and should not exceed 0.5mm (see also Figure 2: Module dimensions for code symbol module (x)).




Figure 2: Module dimensions for code symbol module (x)

The blank area around the DataMatrix code must correspond to minimum twice the module widths at all sides of the code.

Based on the available area (A6 and KLT labels: 20mm x 20mm) and the minimum size of the modules (0.4mm), the matrix consists of 52 x 52 modules. The maximum size of the DataMatrix symbol is thus 304 characters (including control characters).

7.2.2. Character sets

1. Characters 0..127 are defined in accordance with ISO/IEC 646, with G0 Set and C0 Set. In C0 Set, characters 28..31 are modified and represent FS, GS, RS and US. Characters 32..127 correspond to the EDIFACT UNOB character set.
2. Characters 128..255 conform to ISO 8859-1 (also known as extended ASCII). This character set corresponds to that defined by EDIFACT UNOC.

7.2.3. Message structure according to ISO 15434

Each DataMatrix symbol contains one message whose structure is based on ISO/IEC 15434. In each DataMatrix code, the data flow might start with control character "Macro 06" (character 237), indicating that data identifiers according to ISO/IEC 15418, part ANS 10.8.2 Data Identifiers are being used. In each symbol, control character "Macro 06" replaces the ISO/IEC 15434 control sequence with preamble " $\text{[}>^{\text{R}}_{\text{S}}06^{\text{G}}_{\text{S}}^4$ " preceding the data and post-amble " $^{\text{R}}_{\text{S}}\text{E}_{\text{OT}}$ " at the end of the data string.

As an alternative to "Macro 06", the above control characters might be used. The separator between the data elements preceded by individual ASC data identifiers (DIs) is the Group Separator " $^{\text{G}}_{\text{S}}$ ".


For the encoding of data in DataMatrix symbols in the form of ISO 15434 messages, it is necessary to include a message envelop consisting of a header and a trailer between which the user data is placed.

The message has the following structure:

- Message header: $\text{[}>^{\text{R}}_{\text{S}}$ (string, hex 5B 29 3E 1E / dec 91 41 62 30)
- Format header: 06 (for structure with DI)
- Group Separator: $^{\text{G}}_{\text{S}}$ (hex 1D / dec 29)
- DI with user data
- Group separator
- DI with user data
- Group separator
- DI with user data
- Group separator
-
- etc.
- Message trailer: $^{\text{R}}_{\text{S}}$ (hex 1E / dec 30)
- Record separator: $^{\text{E}}_{\text{OT}}$ (hex 04 / dec 04)

⁴ $^{\text{G}}_{\text{S}}$ (hex 1D / dec 29) $^{\text{R}}_{\text{S}}$ (hex 1E / dec 30) $^{\text{E}}_{\text{OT}}$ (hex 04 / dec 04)

Example of message,
with dummy user data "111111111", "22222222", "333333", etc.:

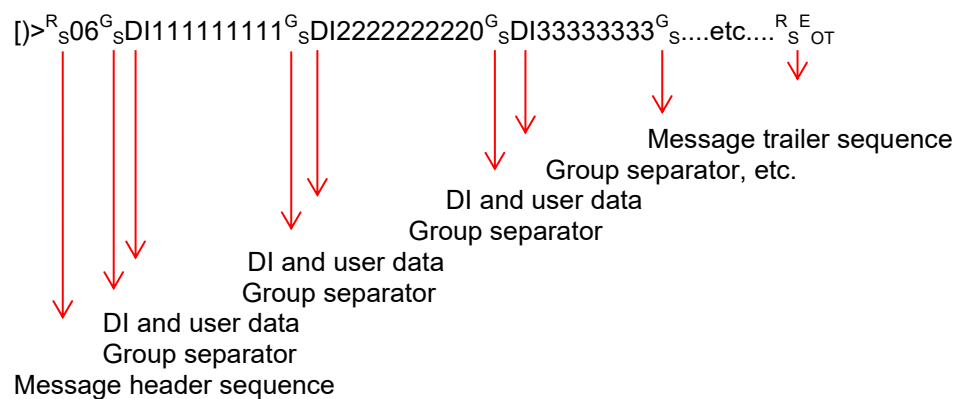

7.2.4. User data for coding in DataMatrix

The following user data must be included in the DataMatrix code:

Table 5 - User data for DataMatrix code in field A3

User data	Source or equivalent in DESADV (VDA 4987)	DI	Comment	Sample data
Identification of specification	none	12P	Identification of specification (Identifies the content version according to this document. GTL3 is a fix content until a new specification requires another fix ID). The fixed content of GTL3 must not be used by the supplier to identify the 2D symbol in the supplier area E1!	12GTL3
Specification version	none	9K	Specification version (Identifies the revision of this specification. 01 is a fix content until a new version of this document with impact to the syntax in code will be published).	9K01
Supplier number of the shipping plant	SG2/NAD+SF DE 3039	3L		3L998877665
Country of origin	SG17/ALI DE 3239	4L	Country of origin, in ISO 3166 2 alpha code	4LDE
Goods receiver ID	NAD+ST DE 3039	8V		8V0110120131
Unloading point ID	NAD+ST/LOC+11 DE 3225	2L		2L0815-12345
Storage location ID	NAD+ST/LOC+7 DE 3225	20L		20L12315
Supplier number of the ship from	NAD+SF DE 3039	V		V123456789012

Despatch advice number	SG18/RFF+AAU DE 1154	2S		2S123456789012
Point of use/consumption	SG20/LOC+159 DE 3225	22L		22LB3P234
Customer specific routing	SG18/RFF+AMU DE 1154	23L		23L050115-1420RNP
Expected delivery date	DTM+2/132 DE 2380	8D	8D followed by date and time in format CCYYMMDDHHMM and qualifier DE 2005 qualifier value in corresponding DTM segment: 2 (agreed delivery date and time) or 132 (estimated delivery date). Depending on the delivery scenario, the DESADV contains the one or the other date.	8D2015122214302
Quantity	SG16/QTY+52 DE 6060 (M label) SG11/QTY+52 DE 6060 (S label)	Q	Data identifier, followed by quantity	Q250
Measure unit	SG16/QTY+52 DE 6411 (M-Label) SG11/QTY+52 DE 6411 (S-Label)	3Q	Measure unit of the quantity qualified with DI Q, coded according to ANSI X12.3 DE 355 Unit of Measure Code - see Table 2	3QPC
Gross weight	SG16/MEA+AAZ+AAB DE 6314 loading unit SG11/MEA+AAY+G DE 6314 inner package	2Q		2Q9999
Article number	SG17/LIN DE 7140	P	Customer part number	P123-234-564
Package ID	SG15/GIN+ML DE 7402 (2)	1J/5J 6J	DI + IAC + CID + SN The serial number must not be longer than 9 digits For DI - refer to Table 4	1JUN98765432112 3456789

Package type	SG11/LIN DE 7065	B		B0009PAL
Used by / expiry date		14D	Format CCYYMMDDHHMM	14D201512312359
Date of manufacture	SG14/DTM+94 DE 2380	16D	Format CCYYMMDDHHMM	16D201512241600
Batch	SG14/GIR+1 DE 7402	1T		1T1234567890123 456
Hardware version	SG17/PIA+1 DE 7143 = BT	20P		20P12345
Software version	SG17/PIA+1 DE 7143 = AG	21P		21PV3R5B123
Revision/parts generation version	SG17/PIA+1 DE 7143 = EC	2P		2PEC123

If the customer specific data in section E2 have to be printed as a 2D DMC, the the sybol is generated as follows:

User data	Source or equivalent in DESADV (VDA 4987)	DI	Comment	Sample data
Identification of specification	ohne	12P	ID - CUS for customer specific data. The fixed content CUS must not be used by the supplier to identify the 2D symbol in the supplier area E1!	12PCUS
Data line 1	SG13/PCI+3 DE 7102#1	11Z		11ZABCDEFGG
Data line 2	SG13/PCI+3 DE 7102#2	12Z		12Z1234567890
...

Data line 10	SG13/PCI+3 DE 7102#10	20Z		20ZXYZ12345
--------------	-----------------------	-----	--	-------------

Also for this symbol the syntax is identified with the preamble $I] >^R_s 06^G_s$.

7.3. RFID tags used in conjunction with smart labels

In the future, it is expected that the package ID (license plate) will not only be stored in certain processes where smart labels are used, but will also be saved on RFID transponders in order to facilitate radio frequency identification.

The main technical requirements for the use of RFID in such cases are described below, based on the general recommendation for the use of RFID in the automotive industry laid down in VDA 5500.

7.3.1. Function of passive RFID transponders

According to VDA 5500, passive RFID transponders are particularly suitable for the automated identification of packages. Their maintenance and operating costs are low, as there is no need to change the batteries, etc. Suitably sturdy transponders generally last for the entire life cycle of the return container.

7.3.2. Air interface and frequency range

The design of the air interface conforms to ISO/IEC 18000-63/ EPC class 1 Generation 2. For more details regarding valid frequency ranges and the use of passive RFID transponders in the automotive industry, please refer to VDA 5500.

7.3.3. Structure and size of memory banks

Passive RFID transponder conforming to ISO/IEC 18000-63/EPC Class 1 Generation 2 feature four logical memory banks (MB):

- MB 00 "RESERVED" – Kill- and Access-Password
- MB 01 "EPC" – Unique Item Identifier (UII)
- MB 10 "TID" – Tag Identification
- MB 11 "USER" – User Memory (UM)

The unique package ID is saved in memory bank MB 01. After writing, the memory bank is protected with a password-enabled lock or perma-lock command to prevent interference with the ID.

The precise size of the memory banks depends on the type of chip in the RFID transponder. The transponder type and the chip must be chosen based on the actual data structure to be saved on the RFID transponder (see also chapter 7.3.4). In addition, the method of coding and the volume of data must be taken into account. In the automotive industry, the most common data structure for the unique item identifier (UII) is maximum 22 alphanumeric (an) digits.

The principle rules for unique item identification based on the relevant ISO-IEC standards are described in detail in VDA 5500. In this document, we focus exclusively on codes that are typically used for the identification of packages. The globally unique package ID is saved in memory bank MB 01. The package ID is coded in the form of a 6-bit character. For package IDs with a length of 22 digits conforming to this recommendation, 224 bits (net) must be available on the transponder in memory bank MB 01. In the context of package identification according to ISO/IEC, the following Application Family Identifiers (AFIs) have been defined:

Table 6

AFI	Standard
A2	ISO 17365 – Supply chain applications of RFID – Transport Units
A7	ISO 17365 – Supply chain applications of RFID – Transport Units (hazardous materials)

7.3.4. Example of code according to ISO 17367

Example: (1J) UN 499774731 123456789

Text string: 1JUN499774731123456789

The text string is 6-bit encoded (see table xyz), and padding bits are added until the total number of Ull bytes is an even number. The Ull length in the PC section (header) section can thus be recorded in 16-bit words (2 bytes).

Reference ID (plain text)
1JUN499774731123456789

Compaction 6-bit code including <EoT>					
110001	001010	010101	001110	110100	111001
111001	110111	110111	110100	110111	110011
110001	110001	110010	110011	110100	110101
110110	110111	111000	111001	100001	

Split into 8-bit fragments including padding bits					
11000100	10100101	01001110	11010011	10011110	01110111
11011111	01001101	11110011	11000111	00011100	10110011
11010011	01011101	10110111	11100011	10011000	01 100000

Hex code					
C4	A5	4E	D3	9E	77
				1C	B3
DF	4D	F3	C7		
D3	5D	B7	E3	98	60

PC data in MB 01 (see section 7.3.3):

Ull-length of 16-bit words: 0b **01001** (18 bytes → #9 words)
 Valid User Memory: 0b **0** (no user memory)
 XPC: 0b **0** (not used – reserved)
EPC or ISO code: 0b **1** (ISO)
 All PC bits: 0b **01001001** (hex 49)

Protocol Control	AFI
49	A2

Complete content of MB 01 (including header):

P	A	Ull Reference ID																	
C	F																		
I	I																		
49	A2	C4	A5	4E	D3	9E	77	DF	4D	F3	C7	1C	B3	D3	5D	B7	E3	98	60

For more information, refer to VDA 5500.

Table 7 - Coding table 6-bit character encoding according to ISO 17367 Table C.1

Character	Binary value	Character	Binary value	Character	Binary value	Character	Binary value
Space	100000	0	110000	@	000000	P	010000
<EoT>	100001	1	110001	A	000001	Q	010001
<Reserved>	100010	2	110010	B	000010	R	010010
<FS>	100011	3	110011	C	000011	S	010011
<US>	100100	4	110100	D	000100	T	010100
<Reserved>	100101	5	110101	E	000101	U	010101
<Reserved>	100110	6	110110	F	000110	V	010110
<Reserved>	100111	7	110111	G	000111	W	010111
(101000	8	111000	H	001000	X	011000
)	101001	9	111001	I	001001	Y	011001
*	101010	:	111010	J	001010	Z	011010
+	101011	;	111011	K	001011	[011011
,	101100	<	111100	L	001100	\	011100
-	101101	=	111101	M	001101]	011101
.	101110	>	111110	N	001110	<GS>	011110
/	101111	?	111111	O	001111	<RS>	011111

8. Delivery scenarios and requirements regarding the information on the labels

Labels are used in all processes: shipment, transport, goods receipt and internal storage and routing to the place of consumption. This recommendation focuses only on scenarios in relation to customer delivery instructions, daily call-offs and just-in-time (JIT) processes. Customer delivery instructions and daily call-offs differ only as regards the frequency of the posting and transfer of the call-offs.

The following rule applies to delivery instructions and daily call-offs: each loading unit has a binding delivery date and time (arrival date/time at destination) and an unloading point, an internal routing code at the customer side might be necessary as well.

Contents of labels attached to Product Packaging Units

From the point of view of the supplier, it is important to distinguish between parts that are manufactured for a single goods recipient (normally a specific customer plant, or multiple customer plants that have the same packaging instructions and use the same article number (customer part number)), or for multiple customer plants with different packaging instructions. Sometimes, however, parts are manufactured for multiple customers, a process referred to as anonymous production. This distinction is relevant, as it determines whether the supplier can apply the final transport label to the PPU or not.

Case 1	Production for single customer and delivery to multiple recipients with identical packaging instructions and article number.
Case 2	Production for single customer and delivery to single recipient
Case 3	Production for multiple customers

Normally, the parts are produced prior to receipt of a binding call-off. As a consequence, not all information necessary for shipping is available at the time of production. Suppliers therefore often need to store the articles in containers bearing temporary labels, these labels then need to be changed upon receipt of the call-off. Apart from the inefficiency, this process can lead to errors.

In cases 1 and 2, it is possible to use PPU labels on which certain information is omitted, provided that product tracing remains possible and parts can be blocked from shipping, should there be problems in relation to their quality. For such cases, we recommend using batch numbers.

Case 1:

If the part number and the packaging instructions are identical for all recipients of the goods, a Single Label for case 1 can be used on the inner packages.

Requirements at the customer side:

- the receipt of the incoming goods and their storage is controlled on the basis of the information on the Master Label of the TPU;
- the customer does not require routing ID / point of consumption information;
- the supplier number is the same for all recipients of the goods;
- the parts can be fully traced internally by means of the package ID and/or the batch number.

In this case, the following information can be omitted on the Single Labels for the PPU.

- Goods recipient
- Despatch advice number
- Order or call-off number
- Routing/point of consumption information

Example of labels for case 1:


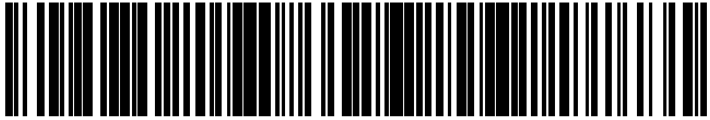

SHIP FROM LIEFERANT AG WERK BERLIN BERLIN DE-10117 ID: 887766554		SHIP TO GB PLANT / UNLOADING POINT / CUSTOMER INTERNAL DESTINATION		S	
COUNTRY OF ORIGIN: DE					
DELIVERY NOTE NUMBER		CUSTOMER SPECIFIC ROUTING INFORMATION		ETA	
SUPPLIER NUMBER 987654321				QUANTITY (ST) 25	NET KG 11,80
CUSTOMER PART NUMBER		RIGHT MOUNT ALUMINIUM			
GFS-123-554-765					
PACKAGE-ID (1)		UN 987654321 000123476		PACKAGING TYPE 6280RL	PRODUCTION DATE P 2016-01-14
				BATCH NUMBER CH1234	ENGINEERING CHANGE / HARDWARE REV. / SOFTWARE REV. 2015-11-01
SUPPLIER AREA A1B2C3D4E5F6G7					
					

Figure 19 - Single label case 1

Case 2:

Case 2 corresponds to case 1, whereby the supplier produces the part for a single goods recipient. The customer-side logistics references (unloading point, storage location, point of use) are always the same and known.

In this case, a Single Label for case 2 can be applied to the PPUs.

Requirements at the customer side:

- The parts can be fully traced internally by means of the package ID and/or the batch number.

In this case, the following information can be omitted on the Single Labels for the PPUs.

- Delivery note number

Example of label for case 2:

SHIP FROM SUPPLIER.COMPANY STREET CITY COUNTRY-ZIP.CODE ID: 12345678 COUNTRY OF ORIGIN DE DELIVERY NOTE NUMBER		SHIP TO CUSTOMER.COMPANY PLANT XY COUNTRY ZIP.CODE CITY PLANT / UNLOADING POINT / STOCK LOCATION PLANT / UNLOADING / STORAGE CUSTOMER SPECIFIC ROUTING INFORMATION ROUTE 66 LINE 15		S		PACKAGING TYPE KLT4147	SHIP / EXPIRY / PROD. - DATE P 2016-05-10
SUPPLIER NUMBER 12345678		ETA QUANTITY PC 24				BATCH NUMBER A12345	INDEX A
CUSTOMER PART NUMBER		PART NAME 1234567890123 - 001		GROSS KG 15		NET KG 13	
PACKAGE-ID (1J) UN 123456789 554433222				A2C1234567890			
							

Figure 20

Case 3:

In all scenarios that do not meet the requirements for cases 1 and 2, the label on the inner package must be printed and applied as part of the shipping preparation process. At this point, all necessary information is available and can be printed on the label.

The use of Single Labels (case 1 or 2) on inner packages must be agreed bilaterally between the customer and the supplier.

Cross-dock shipments

There are two types of cross-dock processes:

- The unloading point (and thus the location of performance for the supplier) is the factory of the recipient of the goods (see also figure 2). If necessary, the first cross-dock along the transport chain (consolidation point) is identified as a cross-docking point in order to provide the necessary details to the initial goods carrier.
- The unloading point is the (first) cross-docking point. Subsequently, the goods are forwarded from the cross-dock to the actual recipient and handed over to the customer/recipient of the goods.

In the first case, the parties have agreed binding routes between the consolidation centre and the subsequent routes. If necessary, the route needs to be specified in field E2 on the label in order to assist the partners in compiling the consignment.

In the second case, new consignments are produced for shipping from the cross-dock to the individual recipients of the goods. The necessary routing information can again be included in field E2.

In both cases, the customer decides on the scope and detail of the information to be included in the PCI segment of the call-offs sent to the supplier.

9. Appendices

9.1. Appendix 1 - Overview of data fields (Excel spreadsheet)

See separate document

9.2. Appendix 2 - Masks for barcodes / DMC (including dimensions)

See separate document

9.3. Appendix 3 - Reference table of German and English terms

DEUTSCH	ENGLISCH
VERSENDER	SHIP FROM
EMPFÄNGER	SHIP TO
URSPRUNGSLAND	COUNTRY OF ORIGIN
WERK	PLANT
ABLADESTELLE	UNLOADING POINT
INTERNER BESTIMMUNGSSORT	INTERNAL DESTINATION
LIEFERSCHEIN	DELIVERY NOTE
LIEFERANTENNUMMER	SUPPLIER NUMBER
KUNDENSPEZIFISCHES ROUTING	CUSTOMER SPECIFIC ROUTING
ETA (ERWARTETES EINTREFFDATUM)	ETA
MENGE	QUANTITY
NETTO	NET
BRUTTO	GROSS
SACHNUMMER DES KUNDEN	CUSTOMER PART NUMBER
PACKSTÜCK-ID	PACKAGE ID
PACKMITTEL TYP	PACKAGING TYPE
VERSANDDATUM	SHIPMENT DATE
PRODUKTIONS DATUM	PRODUCTION DATE
VERFALL DATUM	EXPIRY DATE
CHARGENNUMMER	BATCH NUMBER
TEILEGENERATIONSSTAND	ENGINEERING CHANGE
HARDWARESTAND	HARDWARE REVISION
SOFTWARESTAND	SOFTWARE REVISION
LIEFERANTENSPEZIFISCHE DATEN	SUPPLIER AREA